

### Applications

KEF's Ci Motorised Series is designed to lie flush with the ceiling when not in use - making them ideal for home theatre, especially in combination with motorised screens as part of a fully automated system.

In the commercial environment they are highly suitable for a discreet solution in boardrooms. When required, they purr into position at the touch of a remote, to deliver a sweeping soundstage with rock solid imaging.

### **Product information**

Purposely built for flush mounting into ceilings, the *Ci3-80QT* is a powerful motorized speaker that delivers the highest quality of flushmount audio performance available.

### Features & Benefits

Purposely built for flush mounting into ceilings the *Ci3-80QT* is the latest addition to the KEF Uni-Q Custom Installation Series. The three-way, *Ci3-80QT* combines 100W power handling and 87dB sensitivity and consists of a polypropylene cone LF driver with the HF unit mounted between two matched size LF units.

Will require an additional 12 volt supply. The bezel and grill can be painted to match the interior décor.







## www.powerhouse.com.pk

FL-42, Block-B, Gulshan-e-Jamal, Karachi, Pakistan. T: +92 213 4573167 +92 213 4688867 E: info@powerhouse.com.pk

#### Architectural Specifications


The Ci3-80QT comprises a Uni-Q® array with a coincident mounted, twin neodymium magnet, 15mm (3/5in.) aluminium dome, high-frequency unit, a 75mm polypropylene midrange unit and two 75mm bass drivers. Performance should meet or exceed the following criteria:

Frequency response 1 metre on-axis with swept sinewave shall be 87Hz to 27kHz, sensitivity shall be at least 87dB for 2.83V@1m. The impedance and maximum power shall be 100W at 8 ohms.

#### **Specifications**

NOMINAL IMPEDANCE	8 Ω
SENSITIVITY	87dB (2.83V/ 1m)
FREQUENCY RESPONSE	87 - 27k (±6dB) With back can/rear enclosure
CROSSOVER FREQUENCIES	300Hz, 3kHz
DRIVE UNITS	LF / MF / HF : 2 x 75mm / 75mm / 15mm
RECOMMENDED AMPLIFIER POWER	10 - 100W
FEATURES	Three-way In-Ceiling Uni-Q Array, Quiet Motorised
PRODUCT EXTERNAL DIMENSIONS	H x W x D : 128mm (5.04in.) / 377mm (14.84in.)
	/ 125mm (4.92in.)
CUT-OUT DIMENSIONS	H x W : 112mm (4.41in.) / 354mm (13.94in.)
MOUNTING DEPTH FROM SURFACE	Product only : 120mm (4.72in.)
UNIT MEASUREMENT	Piece
DOCUMENT DOWNLOAD	Ci3-80QT Information Sheet and Manual
	EASE GLL Data
	Ci Series Brochure
	Ci Series Specification Sheet
	User Manual
	Ci Series Minimum Cabinet Volume Chart
	Product drawing

INSTALLATIONS

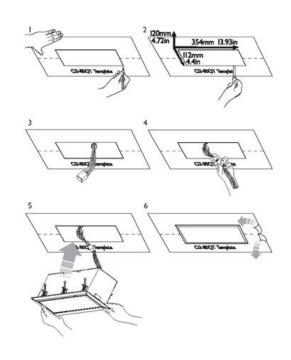



# www.powerhouse.com.pk

FL-42, Block-B, Gulshan-e-Jamal, Karachi, Pakistan. T: +92 213 4573167 +92 213 4688867 E: info@powerhouse.com.pk