




Surface Downlight

Features & Benefits

- Built-in Aluminium profile for good heat dissipation
- Thermal conductive plastic housing ensures safety
- Surface Mounted Frame works as an individual fitting of Surface Downlight.
- Elegant Design, Easy to Fix
- Dimmable version available as an option
- Working temperature: -20°C ~ 40°C
- Rated life 30000 hours

Surface Downlight

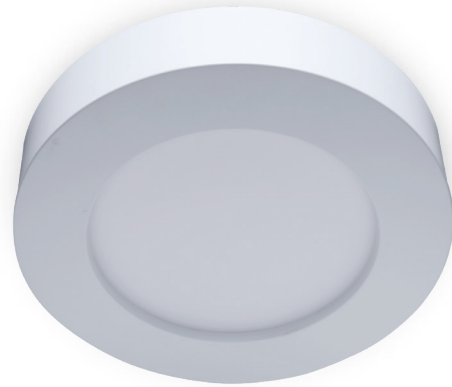

Applications

- General Lighting
- Office
- Retail
- Healthcare
- Education
- Industries

Coarts LED Surface Downlight transforms ambient lighting into an exquisite balance of refined appearance and superior efficiency.

Specifications

CODE	WATTS	Voltage	PF	CRI	CCT	Lumens	Beam	IP Rating	DIM (mm)	Life Time
CLS-SMDL-6W	6 W	220-240V	>0.5	Ra>70	3000K	231 lm	120°	IP20	Ø120 X 35	30000 hrs
	4000K				263 lm					
	6500K				295 lm					
CLS-SMDL-12W	12 W				3000K	616 lm			Ø165 X 35	30000 hrs
					4000K	702 lm				
					6500K	787 lm				
CLS-SMDL-18W	18 W				3000K	1000 lm			Ø215 X 35	30000 hrs
					4000K	1139 lm				
					6500K	1278 lm				

