




SLIM V2 DOWNLIGHT ROUND

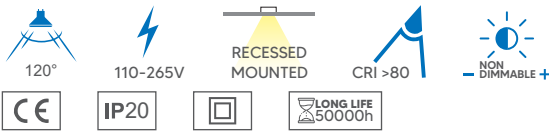

Features

- Built-in LED driver.
- Slim and elegant design.
- Easy installation and maintenance.
- Its high transparency diffuser gives an extensive lighting effect.
- Provides good heat dissipation with built-in Aluminum profile and thermal conductive plastic housing that ensures safety.
- Ideal for low depth ceilings and compact spaces.
- Working temperature: -20°C ~ 40°C.

Applications

- General Lighting
- Offices
- Retail outlets
- Healthcare
- Education
- Industries

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 3000K / 4000K / 6500K	DIMENSIONS (mm)	CUTOUT (mm)
CLS-RMDLV2-8W	8	110-265 VAC	>0.5	3000K / 4000K / 6500K	610 / 640 / 680	Ø100 X 25	Ø70-90
CLS-RMDLV2-12W	12				1030 / 1080 / 1140	Ø130 X 25	Ø100-120
CLS-RMDLV2-18W	18				1550 / 1620 / 1710	Ø180 X 25	Ø160-170

Dimensions

