


# HYDRALUX 08M

## LED BATTEN

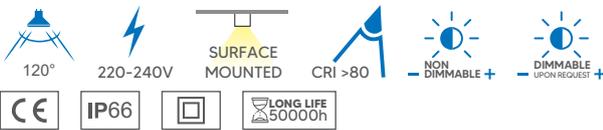

### Features



- Linear weatherproof LED light fixture
- Self extinguishing polycarbonate body with UV inhibitors and durable foam seal
- Highly efficient >120lm/W SMD 2835 LED chip.
- Frosted prismatic polycarbonate lens resists impact (rated IK08)
- Driver compartment integrated to the fixture.
- Surface/suspended mounting option with stainless steel mounting accessories.
- Through wiring option for quick interconnectivity.
- Rated life 50000 hrs @L70
- IP66 input cable gland supplied as standard.

### Applications

- Car Parks
- Corridores
- Industrial setups
- Textile dyeing Area
- Boiler rooms
- Weaving area
- Warehouses
- Retail outlets
- Stairways
- Pool sides

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) @4000K	DIMENSIONS (mm) L X W X H	INSTALL SIZE (mm) A
HYDRALUX08M-18W	18			3000K / 4000K / 6000K	2160	611 X 48 X 60	400
HYDRALUX08M-36W	36	220 -240 VAC	>0.9		4320	1211 X 48 X 60	900
HYDRALUX08M-48W	48				5760	1511 X 48 X 60	1100

### Dimensions

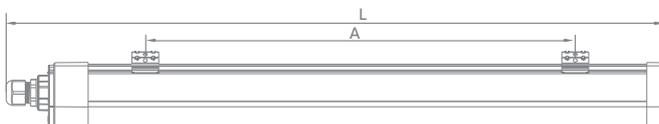

### Accessories

IP66 Cable Gland



Through Wiring

