




SERENE LED PANEL

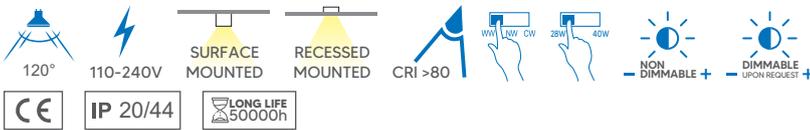

Features


- New range of back lit LED panels providing uniform diffused lighting option with optimum efficiency.
- 3000K, 4000K, 6000K CCT with Pre-settable tri white selector switch.
- Power selector switch providing liberty to run the fixture at 28W and 40W.
- Extremely thin design with only 28mm height.
- Beam angle > 120°, with PMMA lens inside.
- Without LGP, no yellowing risk or failure with extended operating hours.
- Uniform and soft lighting.
- Suspension, surface and recessed installation for option.
- High quality SMD2835 LED chip with life >50000hrs @L70.

Applications

- General Lighting of
 - Office
 - Retail outlets
 - Healthcare facilities
 - Educational institutes
 - Industries

CODE	WATTS (W)	INPUT VOLTAGE	POWER FACTOR	COLOR TEMPERATURE	LUMENS (lm) 28W / 40W	DIMENSIONS (mm)
PNL-SER-2x2-28W/40W	28 / 40	110 -240 VAC	>0.9	3000K	2700 / 4000	595 X 595 X 28
				4000K	2800 / 4100	
				6000K	2900 / 4200	
PNL-SER-1x4-28W/40W	28 / 40	110 -240 VAC	>0.9	3000K	2700 / 4000	295 X 1195 X 28
				4000K	2800 / 4100	
				6000K	2900 / 4200	

Dimensions

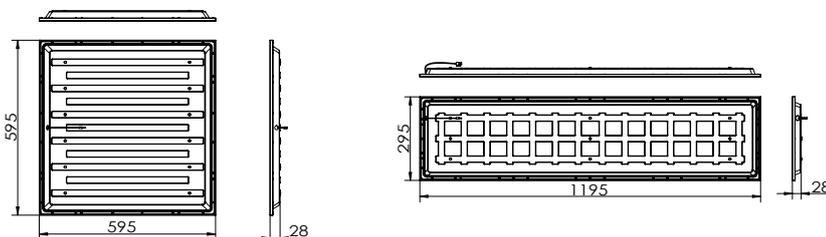

Photometrics

